



APPLICATION OF LANE-DROP AT INTERSECTION

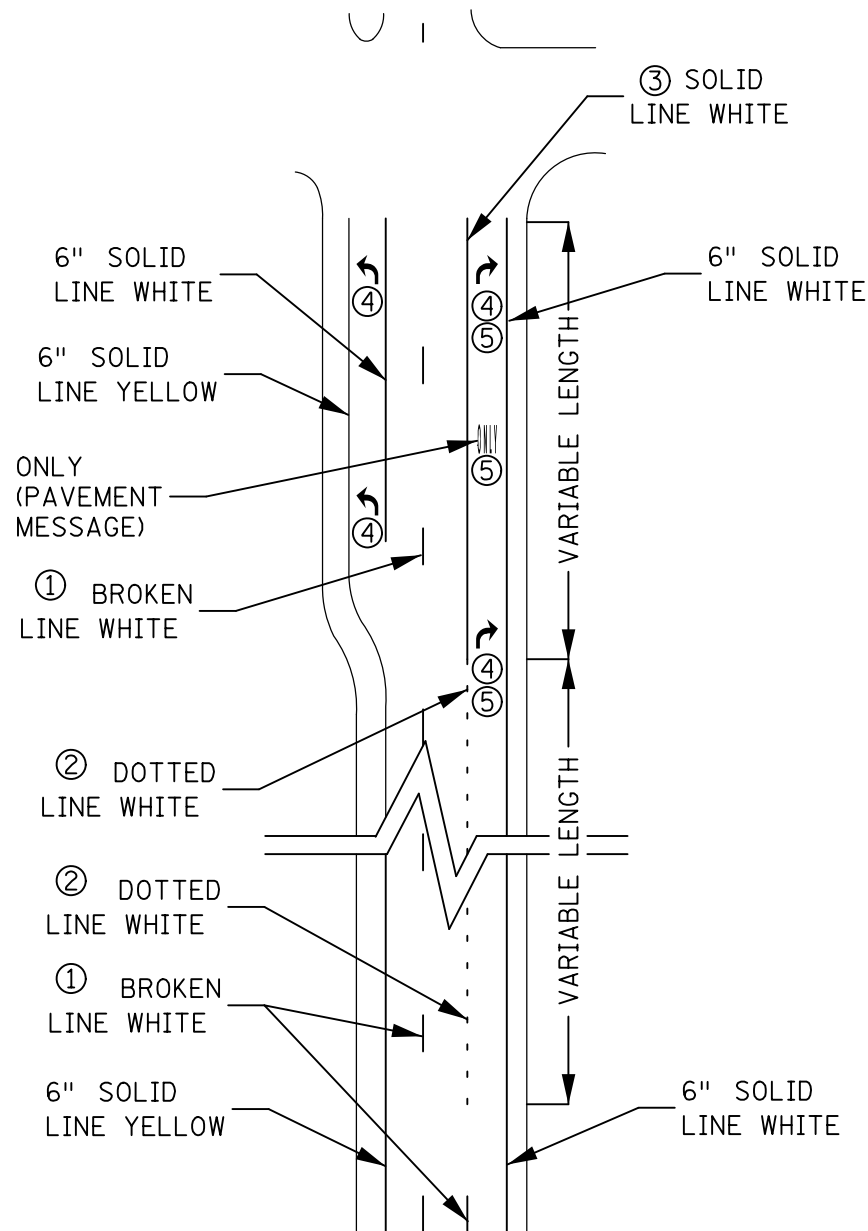

DESIGNER'S NOTES:

- ① DISTRICT MAY USE 6" OR 4" FOR LANE LINES, EXCLUDING TURN LANES, AUXILIARY AND/OR DROP LANES.
- ② USE 8" IF COMING OFF OF A 4" LANE LINE, USE 10" IF COMING OFF OF A 6" LANE LINE.
- ③ MATCH WIDTH OF DOTTED LINE.
- ④ SEE "TURN LANE WITH ARROW MESSAGE, OR WITH DOTTED LINE EXTENSION" TYPICALS FOR PLACEMENT AND NUMBER OF ARROWS OR OPTIONAL LANE LINE EXTENSIONS, (MN MUTCD SECTION 3B.20).
- ⑤ TURN ARROWS REQUIRED, "ONLY" PAVEMENT MESSAGE RECOMMENDED, MNMUTCD 3B.20 PLACE "ONLY" PAVEMENT MESSAGE EQUAL DISTANCE BETWEEN TURN ARROWS.

APPLICATION OF AUXILIARY LANE-DROP MORE THAN 1 MILE BETWEEN INTERSECTIONS

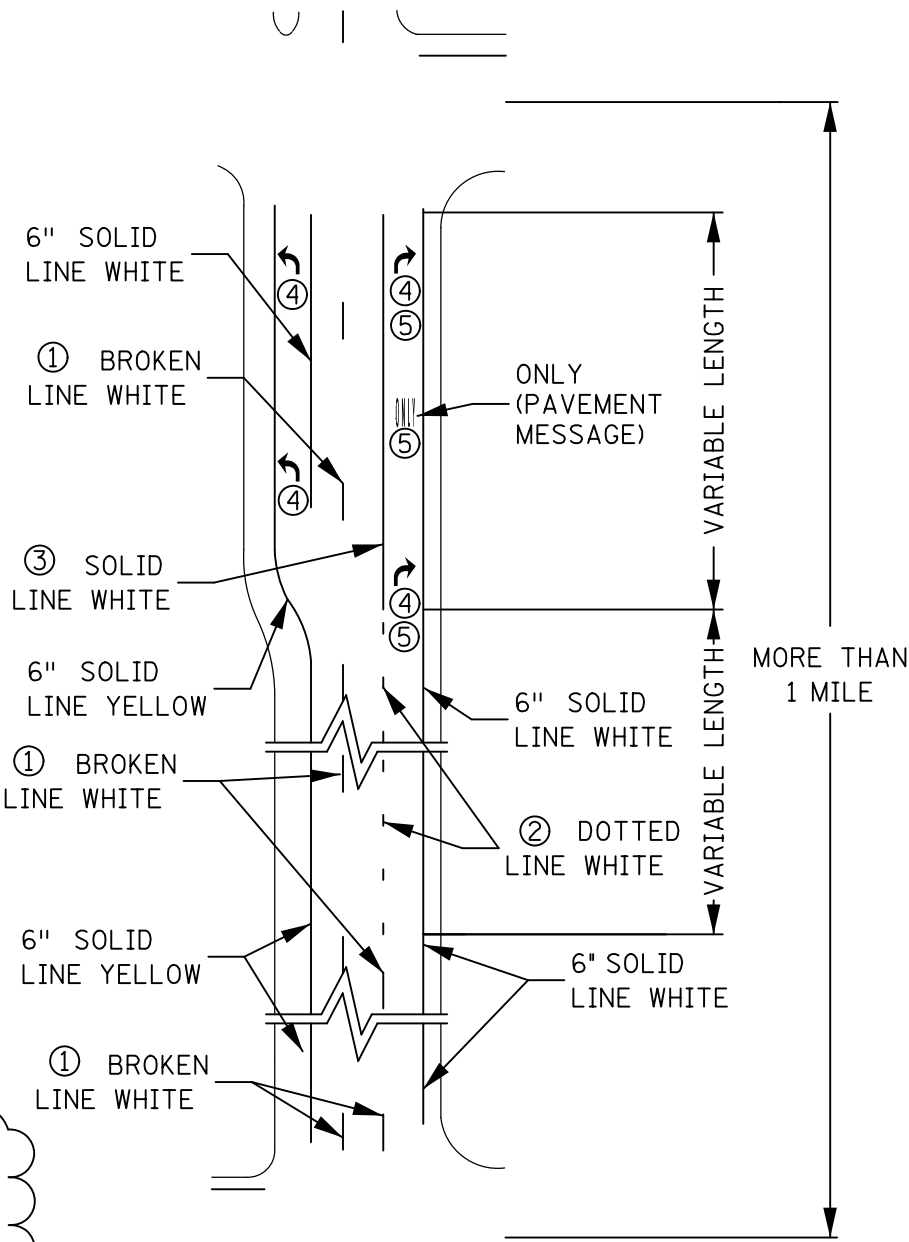


DESIGNER'S NOTES:

- ① DISTRICT MAY USE 6" OR 4" FOR LANE LINES, EXCLUDING TURN LANES, AUXILIARY AND/OR DROP LANES.
- ② USE 8" IF COMING OFF OF A 4" LANE LINE, USE 10" IF COMING OFF OF A 6" LANE LINE.
- ③ MATCH WIDTH OF DOTTED LINE.

- ④ SEE "TURN LANE WITH ARROW MESSAGE, OR WITH DOTTED LINE EXTENSION" TYPICALS FOR PLACEMENT AND NUMBER OF ARROWS OR OPTIONAL LANE LINE EXTENSIONS, (MNMUTCD SECTION 3B.20).
- ⑤ TURN ARROWS REQUIRED, "ONLY" PAVEMENT MESSAGE RECOMMENDED, MNMUTCD 3B.20 PLACE "ONLY" PAVEMENT MESSAGE EQUAL DISTANCE BETWEEN TURN ARROWS.

APPLICATION OF AUXILIARY LANE-DROP 1 MILE OR LESS BETWEEN INTERSECTIONS

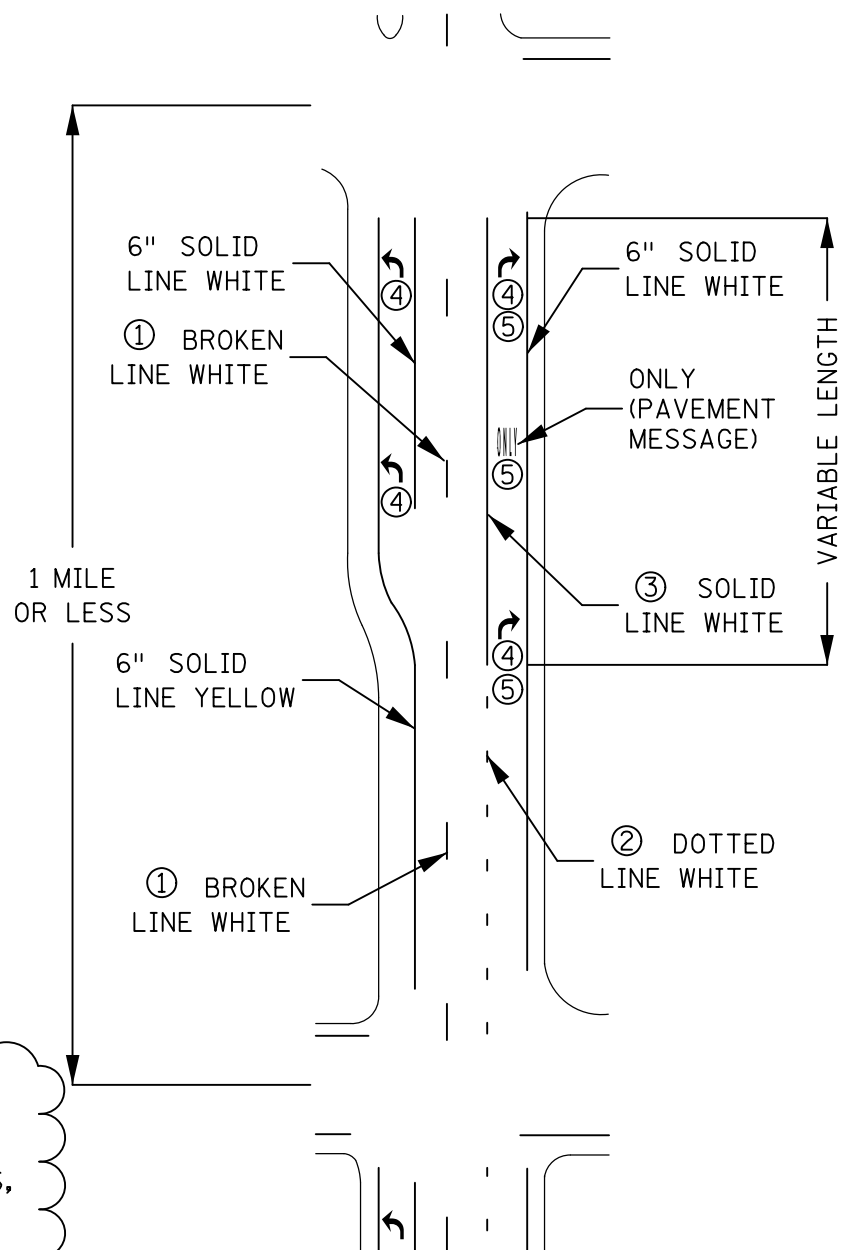

DESIGNER'S NOTES:

- ① DISTRICT MAY USE 6" OR 4" FOR LANE LINES, EXCLUDING TURN LANES, AUXILIARY AND/OR DROP LANES.
- ② USE 8" IF COMING OFF OF A 4" LANE LINE, USE 10" IF COMING OFF OF A 6" LANE LINE.
- ③ MATCH WIDTH OF DOTTED LINE.
- ④ SEE "TURN LANE WITH ARROW MESSAGE, OR WITH DOTTED LINE EXTENSION" TYPICALS FOR PLACEMENT AND NUMBER OF ARROWS OR OPTIONAL LANE LINE EXTENSIONS, (MNMUTCD SECTION 3B.20).
- ⑤ TURN ARROWS REQUIRED, "ONLY" PAVEMENT MESSAGE RECOMMENDED, MNMUTCD 3B.20 PLACE "ONLY" PAVEMENT MESSAGE EQUAL DISTANCE BETWEEN TURN ARROWS.