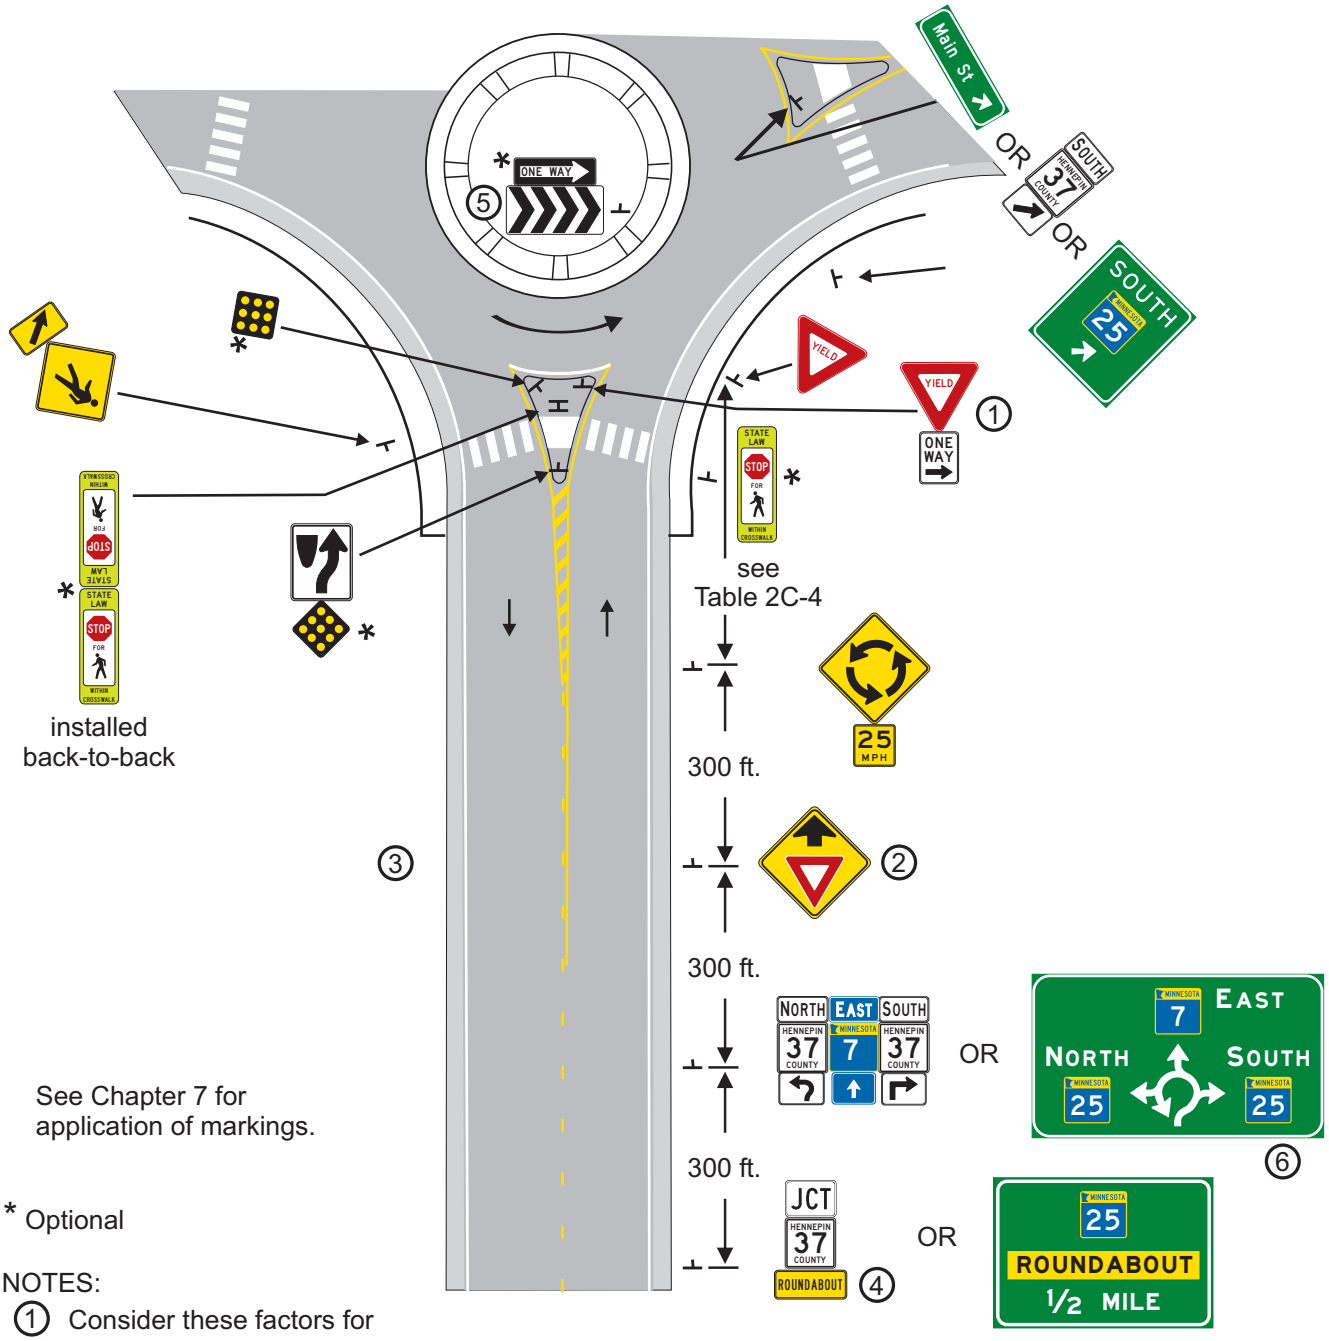

See Chapter 7 for application of markings.

* Optional

NOTES:

1. Consider these factors for placement, visibility, skew, and geometrics.
2. Optional where posted speed limit is ≤40 mph. See Chart 6.5 for sign placement distance.
3. See Figure 6.32 for post intersection signing.
4. If there is no junction route marker assembly, then install the roundabout plaque above the roundabout warning sign.
5. Use the R6-4B sign for speed zones ≥ to 45 mph and/or multi-lane approaches. Use the R6-4A sign for speed zones < 45 mph and single lane approaches.
6. Diagrammatic sign shall be installed for speed zones ≥ 55 mph. Signs may be installed at District Traffic Engineer's discretion for speed zones 40-50 mph.

Text Ref.: 6-7.04

January 12, 2013	**SINGLE LANE ROUNDABOUT**	FIGURE 6.xx