




**TWO LANE, TWO WAY**

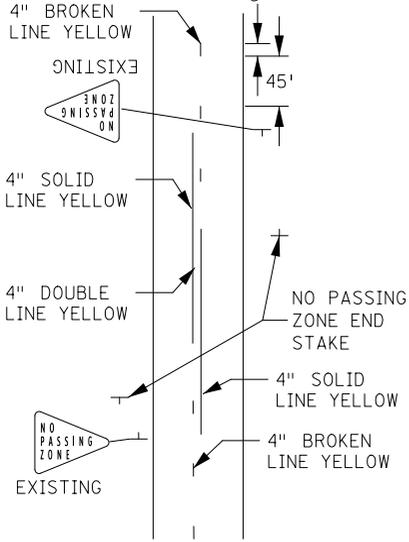

**TWO LANE, TWO WAY  
WITHOUT MARKINGS  
LESS THAN 400 ADT**

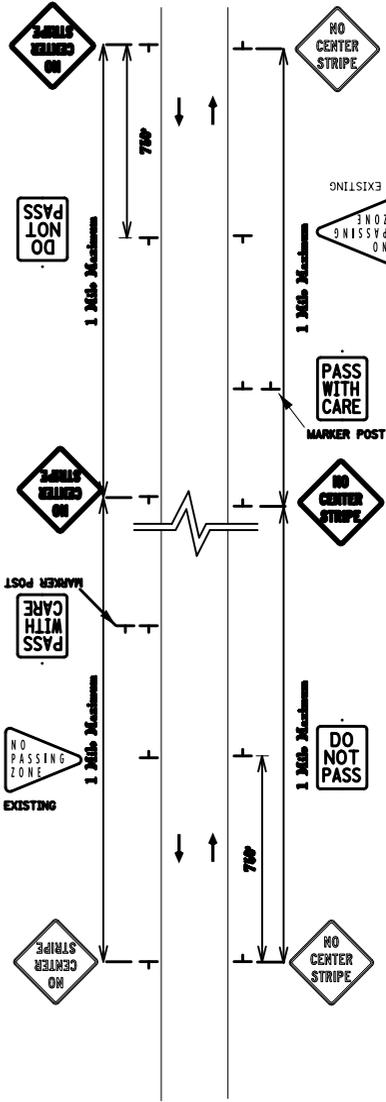

**SIMULATING A SOLID LINE AND A BROKEN LINE (50 FOOT CYCLE) WITH TRPM'S**

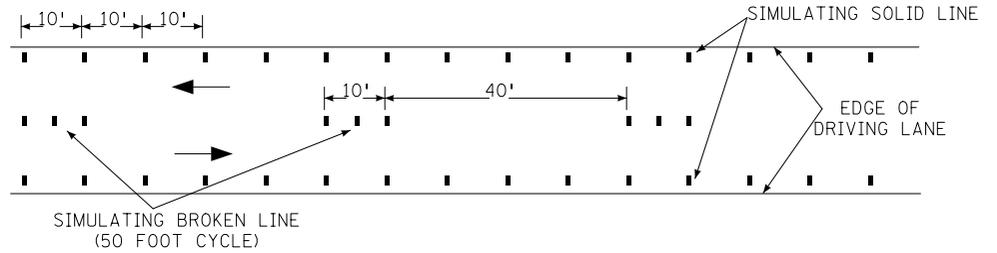

**USING TRPM'S AS INTERIM PAVEMENT MARKING**

WHEN TRPM'S ARE USED TO SIMULATE A LINE THE FOLLOWING GUIDELINE APPLIES:

SKIP STRIPE - USES 3 TRPM'S PER 10' SKIP STRIPE ON 5' CENTERS WITH A 40' GAP

SOLID LINE - USES TRPM'S ON 10' CENTERS ON TANGENTS, FLATTER GRADES AND CURVES UNDER 6 DEGREES. FOR CURVES OVER 6 DEGREES AND STEEP GRADES, THIS SPACING SHALL BE REDUCED TO 5' CENTERS.

**GENERAL NOTES:**

SEE SPECIAL PROVISIONS FOR INTERIM PAVEMENT MARKING GUIDELINES

THESE INTERIM PAVEMENT MARKING GUIDELINES APPLY TO ALL TEMPORARY TRAFFIC CONTROL ZONES OF AT LEAST 300' IN LENGTH ON TANGENT AND 50' ON CURVES OF 6 DEGREES OR GREATER.

- FOR ALL PROJECTS GREATER THAN 1.25 MILES IN LENGTH, INTERIM SKIP STRIPE PAVEMENT MARKINGS SHALL USE THE SAME CYCLE LENGTH AS FINAL PAVEMENT MARKINGS (50') AND SHALL BE A MINIMUM OF 5' LENGTH. DOTTED LINE CYCLE SHALL BE 3' LINE 12' GAP UNLESS STATED OTHERWISE IN THE PLAN.
- ON PROJECTS GREATER THAN 300' IN LENGTH, BUT LESS THAN 1.25 MILES IN LENGTH, THE INTERIM MARKING SHALL MATCH THE CYCLE LENGTH AT EITHER END OF THE PROJECT. THE INTERIM STRIPE SHALL BE 5' IN LENGTH. DOTTED LINE CYCLE SHALL BE 3' LINE 12' GAP UNLESS STATED OTHERWISE IN THE PLAN.

ALL INTERIM MARKINGS SHALL BE PLACED PRIOR TO REMOVING LANE CLOSURE OR OPENING THE ROADWAY TO TRAFFIC. INTERIM PAVEMENT MARKINGS SHALL CONSIST OF CENTER LINE (INCLUDING NO-PASSING ZONES), PAINTED ISLAND (MINUS CROSSHATCHING), AND ALL LANE LINES (INCLUDING TURN LANE LINES), AND SHALL BE THE SAME WIDTH AS THE CORRESPONDING PERMANENT PAVEMENT MARKINGS.

FINAL MARKINGS AND ALL OTHER PAVEMENT MARKINGS INCLUDING EDGLINES, CHANNELIZING LINES, LANE REDUCTION TRANSITIONS, GORE MARKINGS AND OTHER LONGITUDINAL MARKINGS AND THE VARIOUS NON-LONGITUDINAL MARKINGS (STOP LINES, RAIL ROAD CROSSING, CROSSWALKS, WORDS, SYMBOLS, ETC) SHOULD BE PLACED WITHIN 14 CALENDAR DAYS.


WHEN FINAL MARKINGS ARE TO BE EPOXY AND PAINT IS USED FOR INTERIM SOLID LINES, A 10 MIL THICK LAYER APPLICATION OF A WATER-BASED TRAFFIC MARKING PAINT SHALL BE USED, WITH A 10 MIL LAYER OF PAINT APPLIED, BEADS SHOULD BE APPLIED AT A RATE OF 6 LBS/GAL. REMOVAL OF THE 10 MIL LAYER OF PAINT IS NOT REQUIRED PRIOR TO PLACING THE EPOXY.

**USING SIGNING AS INTERIM PAVEMENT MARKING**


ON LOW VOLUME ROADS WITH AN ADT (AVERAGE DAILY TRAFFIC) OF LESS THAN 400 VEHICLES, THE SIGNS MAY BE USED IN LIEU OF PAVEMENT MARKINGS FOR UP TO 14 CALENDAR DAYS (SEE SECTION 5A.1 OF THE MMUTCD) OR AS DIRECTED BY THE PROJECT ENGINEER.

- IF NO INTERIM MARKINGS ARE USED A "NO CENTER STRIPE" SIGN (W8-12) SHALL BE USED FOR EACH DIRECTION OF TRAVEL. THIS SIGN SHALL BE REPEATED AT MAJOR INTERSECTIONS OR ONE MILE INTERVALS, WHICHEVER IS GREATER.
- IF NOT ALREADY IN PLACE, A "DO NOT PASS" SIGN (R4-1) SHALL BE PLACED ON THE RIGHT SIDE OF THE ROAD AT THE BEGINNING OF THE ZONE OPPOSITE OF THE "NO PASSING ZONE" SIGN (W14-3)

**MULTI-LANE, UNDIVIDED**

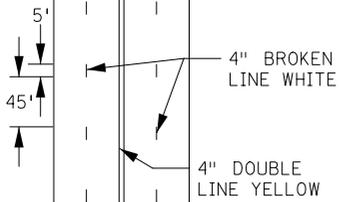

**MULTI-LANE, DIVIDED**

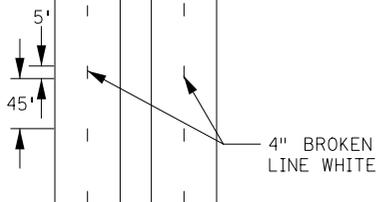

**INTERIM PAVEMENT MARKINGS**